

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

|   |  |  |
|---|--|--|
| <b>UTILITY<br/>PATENT APPLICATION<br/>TRANSMITTAL</b><br>Only for new nonprovisional applications under 37 C.F.R. 1.53(b) | Attorney Docket No.                      | NTL-3.2.118/3229 (11513SC)   |
|   | First Inventor or Application Identifier | Alan D. Eyre, et al.   |
|   | Title                                    | REMOTE BROADCAST OF CALL<br>ANNOUNCE AND CALL SCREENING<br>INFORMATION |
|   | Express Mail Label No.                   | EL401216914US  |

|   |   |
|---|---|
| <b>APPLICATION ELEMENTS</b><br>See MPEP chapter 600 concerning utility patent application contents. | <b>ADDRESS TO:</b> Assistant Commissioner for Patents<br>Box Patent Application<br>Washington, D.C. 20231 |
|---|---|

|   |  |
|---|--|
| 1. <input type="checkbox"/> *Fee Transmittal Form (e.g., PTO/SB/17)<br>(submit an original, and a duplicate for fee processing)   | 5. <input type="checkbox"/> Microfiche Computer Program (Appendix)   |
| 2. <input checked="" type="checkbox"/> Specification Total Pages [ ]<br>(preferred arrangement set forth below)<br><br>- Descriptive title of the invention<br>- Cross References to Related Applications<br>- Statement Regarding Fed sponsored R&D<br>- Reference to Microfiche Appendix<br>- Background of the invention<br>- Brief Summary of the invention<br>- Brief Description of the Drawings (if filed)<br>- Detailed Description<br>- Claim(s)<br>- Abstract of the Disclosure | 6. Nucleotide and/or Amino Acid Sequence Submission<br>(if applicable, all necessary)<br><br>a. <input type="checkbox"/> Computer Readable Copy<br>b. <input type="checkbox"/> Paper Copy (identical to computer copy)<br>c. <input type="checkbox"/> Statement verifying identity of above copies   |
| 3. <input type="checkbox"/> Drawing(s) (35 U.S.C. 113) Total Pages [ ]  | <b>ACCOMPANYING APPLICATION PARTS</b>  |
| 4. Oath or Declaration Total Pages [ ]<br>a. <input type="checkbox"/> Un-executed<br>b. <input type="checkbox"/> Copy from a prior application (37 CFR §1.63(d)<br>(for continuation/divisional with box 16 completed)<br>i. <input type="checkbox"/> <b>DELETION OF INVENTOR(S)</b><br>Signed statement attached deleting<br>inventor(s) named in the prior application,<br>see 37 CFR §§ 1.63(d)(2) and 1.33(b).  | 7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))<br>8. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement [ ] Power of Attorney<br>(when there is an assignee)<br>9. <input type="checkbox"/> English Translation Document (if applicable)<br>10. <input type="checkbox"/> Information Disclosure [ ] Copies of IDS Citations<br>Statement (IDS)PTO-1449<br>11. <input type="checkbox"/> Preliminary Amendment<br>12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503)<br>(should be specifically itemized)<br>13. <input type="checkbox"/> *Small Entity [ ] Statement filed in prior application<br>Statement(s) (PTO/SB/09-12) Status still proper and desired<br>14. <input type="checkbox"/> Certified Copy of Priority Document(s)<br>(if foreign priority is claimed)<br>15. <input checked="" type="checkbox"/> Other: Check No. 22325 for \$2544.00 |
| *NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY<br>SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED<br>(37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS<br>RELIED UPON (37 C.F.R. § 1.26).   |  |

|  |  |
|--|--|
| 16. If a <b>CONTINUING APPLICATION</b> , check appropriate box, and supply the requisite information below and in a preliminary amendment:<br><br><input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No.: _____ / _____<br><br>Prior application information: Examiner _____ Group/Art Unit: _____<br><br><b>For CONTINUATION or DIVISIONAL APPS. Only:</b> The entire disclosure of the prior application, from which an oath or declaration is supplied under<br>Box 4b, is considered to be part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference.<br>The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts. |  |
|--|--|

|  |   |
|--|---|
| <b>17. CORRESPONDENCE ADDRESS</b>                          |   |
| <input type="checkbox"/> Customer Number or Bar Code Label | : or <input checked="" type="checkbox"/> Correspondence address below<br>:(Insert Customer No. Or Attach bar code label here) |

|         |                                |           |                |          |                |
|---------|--------------------------------|-----------|----------------|----------|----------------|
| Name    | COBRIN & GITES                 |           |                |          |                |
| Address | 750 Lexington Avenue, 21 floor |           |                |          |                |
| City    | New York                       | State     | New York       | Zip Code | 10022          |
| Country | U.S.A.                         | Telephone | (212) 486-4000 | Fax      | (212) 486-4007 |

|                   |                         |                                   |         |
|-------------------|-------------------------|-----------------------------------|---------|
| Name (Print/Type) | Lawrence E. Russ        | Registration No. (Attorney/Agent) | 35,342  |
| Signature         | <i>Lawrence E. Russ</i> | Date                              | 3/10/00 |

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231. G:\Apps\WPDATA\NORTEL\3229\UTILITY.TRA

EXPRESS MAIL CERTIFICATE

Date 3-10-00 Label No. EL40121691445

I hereby certify that, on the date indicated above I deposited this paper or fee with the U.S. Postal Service and that it was addressed for delivery to the Commissioner of Patents & Trademarks, Washington, DC 20231 by "Express Mail Post Office to Addressee" service.

ROSEMARIE MEDINA Rosemarie Medina  
Name (Print) Signature

REMOTE BROADCAST OF CALL ANNOUNCE  
AND CALL SCREENING INFORMATION

BACKGROUND OF THE INVENTION

The present invention is directed to customer premises equipment (CPE) and, more particularly, to local or home networks of CPE.

Call announce and call screening are services provided by local telephone companies as part of the Call Screening, Monitoring and Intercept (CSMI) service. The services provide customers with the identity of the source of an incoming call or an incoming second call waiting (SCW) call. Before or after the first ring, typically, the central office (CO) sends a message to the customer's telephone set or CPE set that instructs the set to go off-hook and activate its speaker path so that the central office can announce the name or telephone number of the person making the incoming call. After the announcement is completed, the central office sends another message to the telephone or CPE instructing the set to go back on-hook so that the customer may answer the call, if the customer desires.

Alternatively, the call announce function is carried out by a customer's telephone answering device (TAD), digital telephone answering device (DTAD) or other CPE. The central office (CO) or voice over Internet protocol (VOIP) server sends calling line identification (CLID) data or second call waiting identification (SCWID) data to the TAD, DTAD or CPE. The customer's device parses the number field of the data, accesses a list of

pre-recorded number vocalizations to select those corresponding to the numbers in the number field as well as, possibly, their position in the number field, and then delivers the sequence of number vocalizations to the device's speaker which announces the calling number. The device may also, or instead, match part or all of the CLID data to one or more records of voice tags stored in a database and then deliver the corresponding voice tags to the device's speaker. After the announcement is completed, the customer may answer the call, if desired.

Call screening may also be provided by the customer's TAD, DTAD or other CPE.

When an incoming telephone call is not answered within a preselected interval or preselected number of rings, the TAD, DTAD or other CPE takes the line off-hook and then sends an outgoing voice message over the telephone line to the caller. When the caller replies to the outgoing voice message with an incoming voice message, the incoming voice message is recorded and is also delivered to the device's speaker. The customer may listen to the incoming message and may answer the call, if desired, while the incoming voice message is being announced.

The call announce and call screening features permit a customer to decide beforehand whether to answer the call, and thus the customer need not waste time responding to an unwanted call or caller. Further, the features allow a customer to prioritize between two incoming calls when a second call waiting call is received, even when both calls are desired, so that the customer can decide whether or not to interrupt a first call to respond to a second incoming call. Moreover, the information provided by the call announce or call screening features may be all that is needed by the customer so that the customer need not interrupt other activities to actually answer the call.

The incoming message however, can usually be heard clearly only while the customer is in the room where the telephone set, TAD, DTAD or other CPE is located and/or in close proximity thereto. If the customer is in another room, is not near the device or is otherwise occupied and unable to move to a location where the message can be heard more clearly, the customer may miss the message or not hear the message until the customer subsequently replays it.

It is therefore desirable that the call announce and call screening messages be heard on other devices that are connected to the customer's telephone set, TAD, DTAD or other CPE.

## SUMMARY OF THE INVENTION

The present invention provides for the broadcast of call announce identification information, CLID and SCWID data and/or incoming voice messages by the CPE that receives the message to other CPE that are networked or otherwise connected to it. The invention also enables an on-hook CPE to detect and announce SCWID data or call announce identification information while another CPE device is off-hook.

In accordance with an aspect of the invention, a local CPE broadcasts incoming call information to at least one remote CPE. The local CPE is taken off-hook, an incoming voice message is received, and the incoming voice message is broadcast over a communications network to the remote CPE.

According to another aspect of the invention, a local CPE broadcasts incoming call information to at least one remote CPE. Incoming caller data is received. A corresponding voice message is determined as a function of at least a portion of the incoming caller data, and the voice message is broadcast over a communications network to the remote CPE.

According to a further aspect of the invention, incoming call information is broadcast from a local CPE to at least one remote CPE. The local CPE receives incoming caller data and broadcasts the voice message over a communications network to the remote CPE. The remote CPE determines a corresponding voice message as a function of at least a portion of the incoming caller data.

According to a still further aspect of the invention, incoming call information is announced using on-hook customer premises equipment (CPE). An indication of an incoming CPE alerting signal (CAS) tone is received, a frequency shift keying (FSK) signal is detected as a result of receiving the indication. A corresponding voice message is determined as a function of at least a portion of the FSK signal, and the voice message is announced.

Other features and advantages of the present invention will become apparent from the following detailed description of the invention with reference to the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described in greater detail in the following detailed description with reference to the drawings in which:

Figure 1 is a block diagram showing an arrangement of networked CPE in accordance with an embodiment of the invention.

Figure 2 is a flow chart illustrating a sequence of operations for broadcast of an incoming call screening stream or a voice message in accordance with the invention.

Figure 3 is a flow chart illustrating a sequence of operations for broadcast of an incoming calling line identification data or second call waiting identification data in accordance with the invention.

Figure 4 is a flow chart illustrating another sequence of operations for broadcast of an incoming calling line identification data or second call waiting identification data in accordance with the invention.

Figure 5 is a flow chart illustrating a sequence of operations for an on-hook CPE unit announcing incoming voice information while another CPE unit is off-hook in accordance with the invention.

Figure 6 is a block diagram showing an arrangement for an on-hook CPE unit announcing incoming voice information while another CPE unit is off-hook in accordance with an embodiment of the invention.

Figure 7 is a block diagram showing an arrangement for an on-hook CPE unit announcing incoming voice information while another CPE unit is off-hook in accordance with an embodiment of the invention.

## DETAILED DESCRIPTION OF THE INVENTION

Figure 1 shows an arrangement for the receipt and broadcast of call announcement information, CLID and SCWID data, incoming voice messages, and/or other information, according to an embodiment of the invention. A local CPE device 3 is connected to a CO switch, ISP server or VOIP server 1, or the like, via a voice or data network 2, such as the telephone network or the Internet. The local CPE 3, which may be a telephone set, a TAD, a DTAD, voice mail device, or the like, is also connected to one or

more remote CPE 5 via a communications network 4. The network may be VentureNet, Ethernet, a "blue tooth" network, a X.10 network, a personal computer (PC) network, a wireless network or any other networking environment of sufficient bandwidth. The remote CPE 5 may be located in the same room or in rooms adjacent to the location of the local CPE 3, in the same building as the local CPE 3, or at distant locations.

As an example, the local CPE 3 receives incoming voice signals, such as call announce identification information or incoming voice messages, from the CO switch or VOIP server 1 and broadcasts them to the remote CPE units 5 over the network 4. The broadcast may be global, namely to all of the remote CPE units, or may be only to selected remote CPE units. Also, the local CPE 3 may set up and broadcast over a connection to one or more of the remote CPE 5 or may send connectionless data to the units. The remote CPE 5 may then deliver the incoming voice signals to their respective speakers or to other stand-alone speakers so that the message may be heard by the customer, or the remote CPE may store the message for subsequent playback.

As another example, the local CPE 3 receives incoming caller data, such as CLID or SCWID data, from the CO switch, ISP server or VOIP server 1. The data may be in the form of frequency shift keying (FSK) signals, such as when transmitted by the CO switch, or may be in the form of Multipurpose Internet Mail Extension (MIME) format, Hypertext Markup Language (HTML) format, Java format, Javascript and/or Active X format, etc., such as when transmitted by the ISP server or VOIP server. The local CPE 3 then accesses a database or the like, which may be stored in the local CPE 3 or in another device, matches the data to information stored in the database, extracts the associated voice tags, and broadcasts the voice tags over the network 4 to some or all of the remote CPE devices 5. The local CPE device 3

may set up a connection and broadcast to one or more of the CPE units 5 or may send connectionless data to the units. The remote CPE units 5 may then deliver the voice tags to their respective speakers to be heard by the customer or may store them for subsequent playback.

5           Alternatively, the local CPE 3 receives the CLID or SCWID data and parses the number field of the data. The local CPE then accesses a list of pre-recorded number vocalizations, which may be stored in the local CPE 3 or in another device, selects those corresponding to the numbers present in the number field of CLID or SCWID data as well as, possibly, corresponding to their position in the number field, and then broadcasts the vocalizations over the network 4 to some or all of the remote CPE devices 5 for delivery to their respective speakers or for storage and subsequent playback.

10           As a further alternative, the local CPE 3 receives the CLID or SCWID data and broadcasts the data over the network 4 to some or all of the remote CPE devices 5. The CPE devices 5 then carry out the operations of matching the data to information stored in a database and extracting the associated voice tags and/or the operations of parsing the number field of the data and selecting from pre-recorded number vocalizations, as described above, and then deliver the voice tags or vocalizations to their speakers or store the voice tags or vocalizations.

15           An example of the broadcast of call announce identification information or incoming voice messages is now described in greater detail with reference to the flow chart shown in Figure 2. First, the CO switch, VOIP server or ISP server rings the customer's telephone or CPE or sends another indication thereto, and a TAD, DTAD, voice mail unit or remote CPE device goes off-hook, as step 202 shows, and sends an outgoing message over the telephone

20



line. The caller responds with an incoming voice message that is received by the device. The incoming voice message is recorded by the device and is also directed to the device's speaker or hands-free speaker or to another stand-alone speaker, as shown at step 204.

5 The TAD, DTAD, voice mail unit or local CPE device then pages some or all of the remote CPE in the network, which may be any of the networking environments described above, as step 206 shows, and routes the voice message over the paging channel to the other selected CPE, as shown at step 208. The remote CPE deliver the voice message to their respective speakers or to other connected speakers, as step 210 shows, so that the incoming voice message is broadcast at locations remote from the local CPE that received the message from the CO switch. The customer, upon hearing the message at one of the remote locations, may respond to the incoming call or may permit the local TAD, DTAD, or voice mail device, etc. to continue to record the incoming message. The local CPE device then disconnects from the paging channel, as shown at step 212.

10  
15  
20 Alternatively, before or after the CO switch or VOIP or ISP server rings the customer's telephone or local CPE, or instead of ringing the telephone or CPE, the switch or server sends a message, such as via FSK signals, MIME format messages, HTML format messages, Java format messages, Javascript messages, Active X messages, or the like, that instructs the local TAD, DTAD or remote CPE to go off-hook, as shown at step 202, and activate its speaker. The CO switch then sends a voice announcement that includes the name and/or telephone number of the caller. The voice announcement is recorded by the local TAD, DTAD or CPE and is also directed to the local device's speaker or hands-free speaker or to another stand-alone speaker, as step 204 shows. The remaining steps of Figure 2 are then carried as described above.

Figure 3 is flow chart illustrating an example of the broadcast of CLID and SCWID data. Before, after or instead of the first ring, typically, the CO switch or the VOIP or ISP server sends a message to the local CPE that contains the CLID or SCWID data, as step 302 shows. The message may be in the form of FSK signals, which may be preceded by a CPE alerting signal (CAS), or may be in another format as described above. The local CPE matches the data to information stored in a database and extracts the associated voice tags, as shown at step 304. Alternatively or additionally, the local CPE parses the number field of the CLID or SCWID data and selects corresponding vocalizations from a stored, pre-recorded list. The local CPE then packages the voice tags and/or the vocalizations for broadcast as a voice message, as step 306 shows, and then broadcasts the voice message to the remote CPE in a manner similar to that described above regarding Figure 2, as steps 308, 310, 312 and 314 show.

Figure 4 illustrates the flow of another example in which the CLID and SCWID data are broadcast by the local CPE in the form of data, rather than as a voice message, and the database search and/or parsing operations are then carried out by the remote CPE. After the local CPE receives the CLID data or SCWID data in the manner described above, as shown at step 402, the local CPE broadcasts the CLID or SCWID data over a network to one or more remote CPE, as step 404 shows. The remote CPE that receive the CLID or SCWID data then search the database and extract voice tags and/or parse the number field and select the corresponding pre-recorded vocalizations in the manner described above, as shown at step 406. The remote CPE direct the voice tags and/or the vocalizations to their respective speaker devices, as step 408 shows.

It is also possible that an on-hook remote CPE receive call announce identification information and/or CLID and SCWID data by detecting CAS tones and FSK signals, such as while the local CPE is off-hook. As an example, a new call waiting caller ID (type 2) standard, known as a Multiple Extension Interworking (MEI) standard, is under development by the Telephone Industries Association (TIA) and requires all CPE to maintain a synchronous call log whether the CPE is on-hook or off-hook. To maintain such a call log, the MEI CPE must detect the FSK signals that follows the CAS tone.

Figure 5 is flow chart that illustrates an example of an on-hook CPE that receives CLID and SCWID data while another CPE is off-hook. Before, after, or instead of the first ring, typically, the CO switch or VOIP server sends CAS tones to the off-hook local CPE, as step 502 shows. At the same time, the on-hook CPE also receives the CAS tones, as shown at step 504, which alerts the on-hook CPE that the CO switch or VOIP server will shortly send a FSK signal. Alternatively, the on-hook CPE receives an indication that the off-hook CPE has received the CAS tones, such as by the off-hook CPE going on hook for a preset interval, but does not directly detect the CAS tones. An example of such an arrangement is described in U.S. Application Serial No. 09/455,760, titled "On-hook Customer Alerting Signal Detection by Customer Premises Equipment" to J. Freestone, et al., which is incorporated herein by reference.

The on-hook CPE then detects and decodes the FSK signals, as step 506 shows, and extracts the CLID or SCWID data. The on-hook CPE then searches a database and extracts voice tags and/or parses the number field and selects the corresponding pre-recorded vocalizations in the manner described above, as shown at step 508. The on-hook CPE

thereafter directs the voice tags and/or the vocalizations to its respective speaker devices, as step 510 shows.

As a further alternative, the on-hook CPE receives the CAS tones and then detects and decodes the FSK signals, as described above and shown at steps 504 and 506. However, the FSK signal instructs the on-hook CPE to go off-hook and turn on its speaker. The CO switch or the VOIP server then sends a call announce identification voice message which the CPE directs to its speaker. The CPE then goes back on-hook.

Figures 6 and 7 show an example of arrangement in which an on-hook telephone or CPE detects a CAS tone using the CAS detector of an off-hook telephone or CPE that is connected in parallel with the on-hook telephone or CPE. The off-hook CPE detects a CAS tone and then goes on-hook for a preset interval, typically 5-8 ms. An on-hook pulse is detected by the on-hook CPE and is used as an indication that an FSK burst will arrive shortly. The arrangement is described in greater detail in the incorporated U.S. Application Serial No. 09/455,760.

Figure 6 shows a CPE or a telephone which is connected to the tip and ring of a telephone line. A mouthpiece receiver 42 receives and delivers voice tones to an amplifier 6. The voice tones are then transmitted over the telephone network via a closed hookswitch 20 and a diode bridge 24. Hookswitch 20 is closed when the CPE or telephone is off-hook. Incoming voice signals are delivered via the diode bridge 24 and the hookswitch 20 to a receiver amplifier 8 and then via an earpiece 40 to the listener.

A voice cancellation network 10 compares the amplitude of the outgoing voice signal at location "a" to the amplitude at location "c" and attempts to equalize the amplitudes at the two locations. When the two amplitudes are substantially equal, virtually none of the

outgoing voice signals are transmitted to location "b" back to the earpiece 40 so that a caller cannot hear their own voice while speaking on the telephone.

A CAS tone detector 12 detects the CAS tones at location "b". The CAS tones are transmitted over the tip and ring through diode bridge 24 and the closed hookswitch 20 to the amplifier 80 to location "b". When the telephone or CPE is on-hook, the switch 20 is open and the switch 28 is closed so that the CAS tone detector 12 receives the CAS tones from the tip and ring via a hybrid bypass comprised of an amplifier 26 and the closed switch 28.

Figure 7 illustrates an off-hook telephone or CPE 60 and an on-hook telephone or CPE 55 that are connected in parallel with the tip and ring. The off-hook set 60 includes the elements shown in the device of Figure 6, and the on-hook set 55 likewise includes the element of the device shown in Figure 6. However, the telephone or CPE 55 is modified to include a monitor, such as an analog-to-digital convertor 50, which monitors the tip and ring of the telephone line and provides signals to a processor 52, which may be a microprocessor, an application specific integrated circuit (ASIC), a programmable logic array (PLA), or a reduced instruction set chip (RISC), etc. whose instructions are also accordingly modified.

When the CAS tone detector 12 of the off-hook set 60 detects a CAS tone, the detector 12 delivers a corresponding signal to the microprocessor 14, and the microprocessor 14 instructs hookswitch 20 to go back on-hook for a predetermined interval. Typically, the hookswitch goes back on-hook for at least the duration of a flash signal or, for example, for 8-35 ms. The off-hook set 60 then checks for the telephone line to enter a "line idle" or a "high" state to verify that there are no other parallel connected telephones or CPE concurrently off-hook. Alternatively, the processor 14 mutes or decreases the volume of the transmitted voice tones to detect other parallel connected telephones or CPE. The processor

14 of the set 60 then goes back off-hook, re-seizes the telephone line and sends an acknowledgment ACK over the telephone line to instruct the local telephone switch to transmit the FSK signals. The processor also enables the FSK detector 30 to detect the FSK signals.

5           The analog-to-digital convertor 50 of the on-hook set 55 monitors the tip and ring for the pulse generated when the set 60 goes on-hook or for when the set mutes or decreases the volume of the transceiver, and then the monitor signals the processor 52 that set 60 is on-hook, muted or has reduced its volume. The analog-to-digital convertor 50 subsequently signals the processor 52 when the set 60 is again off-hook, and the processor 52 thus  
10 calculates the duration of the flash signal or on-hook interval to determine whether the set 60 has detected a CAS tone. The processor 52 then instructs the FSK detector 54 to detect the FSK signals, processes the FSK signals, turns on its speaker, and delivers the voice tags and/or pre-recorded vocalizations to the speaker, as described above.

15           Although the present invention has been described in relation to particular embodiments thereof, many other variations and modifications and other uses may become apparent to those skilled in the art. It is preferred, therefore, that the present invention be limited not by this specific disclosure herein, but only by the appended claims.

WHAT IS CLAIMED IS:

1. A method broadcasting incoming call information from a local CPE to at least one remote CPE, said method comprising the steps of:

taking said local CPE off-hook;

receiving an incoming voice message; and

5 broadcasting said incoming voice message over a communications network to said at least one remote CPE.

2. The method of claim 1 wherein said CPE is at least one of a telephone set, a telephone answering device (TAD), digital telephone answering device (DTAD), and a voice mail device.

3. The method of claim 1 wherein said local CPE receives at least one ring tone from at least one of a central office (CO) switch, a voice over Internet protocol (VOIP) server, and an Internet service provider (ISP) server prior to taking said local CPE off-hook.

4. The method of claim 1 further comprising the step of transmitting an outgoing voice message after taking said CPE off-hook.

5. The method of claim 1 wherein said broadcasting step includes paging said at least one remote CPE.

6. The method of claim 1 wherein said broadcasting step includes transmitting said voice message over a paging channel.

7. The method of claim 1 wherein said network includes at least one of a VentureNet, a Ethernet, a "blue tooth" network, a X.10 network, a personal computer (PC) network, and a wireless network.

8. The method of claim 1 further comprising the step of said at least one remote CPE delivering said voice message to a speaker device.

9. The method of claim 1 further comprising the step of said at least one remote CPE storing said voice message.

10. The method of claim 1 wherein said voice message is a call announce identification message .

11. The method of claim 10 wherein said call announce identification message is generated by at least one of a central office (CO) switch, a voice over Internet protocol (VOIP) server, and an Internet service provider (ISP) server.

12. The method of claim 1 further comprising the step of receiving a data message instructing said CPE to go off-hook prior to said CPE going off-hook.

13. The method of claim 12 wherein said data message is a frequency shift keying (FSK) signal.

14. A method broadcasting incoming call information from a local CPE to at least one remote CPE, said method comprising the steps of:

receiving incoming caller data at said local CPE;

determining, at said local CPE, a corresponding voice message as a function of at least

5 a portion of said incoming caller data; and

broadcasting, using said local CPE, said voice message over a communications network to said at least one remote CPE.

15. The method of claim 14 wherein said CPE is at least one of a telephone set, a telephone answering device (TAD), a digital telephone answering device (DTAD), and a voice mail device.



16. The method of claim 14 wherein said local CPE receives at least one ring tone from at least one of a central office (CO) switch, a voice over Internet protocol (VOIP) server, and an Internet service provider (ISP) server prior to receiving said incoming caller data.

17. The method of claim 14 wherein said incoming caller data is one of calling line identification (CLID) data and second call waiting identification (SCWID) data.

18. The method of claim 14 wherein said local CPE receives said incoming caller data from at least one of a central office (CO) switch, a voice over Internet protocol (VOIP) server, and an Internet service provider (ISP) server.

19. The method of claim 14 wherein said incoming caller data is received as at least one of a frequency shift keying (FSK) signal, a Multipurpose Internet Mail Extension (MIME) format message, a Hypertext Markup Language (HTML) format message, a Java format message, a Javascript message and/or an Active X format message.

20. The method of claim 14 wherein said determining step includes parsing a number field derived from said FSK signals, and selecting sounds corresponding to said parsed number field.

21. The method of claim 14 wherein said determining step includes matching data derived from said FSK signals to associated voice tags.

22. The method of claim 14 wherein said broadcasting step includes paging said at least one remote CPE.

23. The method of claim 14 wherein said broadcasting step includes transmitting said voice message over a paging channel.

24. The method of claim 14 wherein said network includes at least one of a VentureNet, a Ethernet, a "blue tooth" network, a X.10 network, a personal computer (PC) network, and a wireless network.

25. The method of claim 14 further comprising the step of said at least one remote CPE delivering said voice message to a speaker device.

26. The method of claim 14 further comprising the step of said at least one remote CPE storing said voice message.

27. A method of broadcasting incoming call information from a local CPE to at least one remote CPE, said method comprising the steps of:

receiving, at said local CPE, incoming caller data;

broadcasting, using said local CPE, said voice message over a communications network to said at least one remote CPE; and

determining, at said remote CPE, a corresponding voice message as a function of at least a portion of said incoming caller data.

28. The method of claim 27 wherein said CPE is at least one of a telephone set, a telephone answering device (TAD), digital telephone answering device (DTAD), and a voice mail device.

29. The method of claim 27 wherein said local CPE receives at least one ring tone from at least one of a central office (CO) switch, a voice over Internet protocol (VOIP) server, and an Internet service provider (ISP) server prior to receiving said incoming caller data.

30. The method of claim 27 wherein said incoming caller data is one of calling line identification (CLID) data and second call waiting identification (SCWID) data.

31. The method of claim 27 wherein said local CPE receives said incoming caller data from at least one of a central office (CO) switch, a voice over Internet protocol (VOIP) server, and an Internet service provider (ISP) server.

32. The method of claim 27 wherein said incoming caller data is received as at least one of a frequency shift keying (FSK) signal, a Multipurpose Internet Mail Extension (MIME) format message, a Hypertext Markup Language (HTML) format message, a Java format message, a Javascript message and/or an Active X format message.

33. The method of claim 27 wherein said determining step includes parsing a number field derived from said FSK signals, and selecting sounds corresponding to said parsed number field.

34. The method of claim 27 wherein said determining step includes matching data derived from said FSK signals to associated voice tags

35. The method of claim 27 wherein said network includes at least one of a VentureNet, a Ethernet, a "blue tooth" network, a X.10 network, a personal computer (PC) network, and a wireless network.

36. The method of claim 27 further comprising the step of said at least one remote CPE delivering said voice message to a speaker device.

37. The method of claim 27 further comprising the step of said at least one remote CPE storing said voice message.

38. A method of announcing incoming call information using on-hook customer premises equipment (CPE), said method comprising the steps of:

receiving an indication of an incoming CPE alerting signal (CAS) tone;

detecting a frequency shift keying (FSK) signal as a result of receiving said

5 indication;

determining a corresponding voice message as a function of at least a portion of said

FSK signal; and

announcing said voice message.

39. The method of claim 38 wherein said indication is said CAS tone.

40. The method of claim 38 wherein said indication is at least one of an on-hook pulse, a muting and a reduced volume, and said method further comprises the steps of:

detecting the CAS tone using another CPE that is currently off-hook;

generating, for a predetermined duration, said on-hook pulse, muting or reduced volume from the another CPE when the CAS tone is detected by the another CPE; and

detecting, by the on-hook CPE, the on-hook pulse, muting or reduced volume generated by the another CPE.

41. The method of claim 38 wherein said determining step includes parsing a number field derived from said FSK signals, and selecting sounds corresponding to said parsed number field.

42. The method of claim 38 wherein said determining step includes matching data derived from said FSK signals to associated voice tags

43. The method of claim 38 wherein said determining step includes the steps of: taking said CPE off-hook, and receiving a voice message.

44. The method of claim 38 wherein said announcing step includes delivering said voice message to a speaker device.

45. An apparatus located at a local CPE for broadcasting incoming call information to at least one remote CPE, said apparatus comprising:

means for taking said local CPE off-hook;

means for receiving an incoming voice message; and

5 means for broadcasting said incoming voice message over a communications network to said at least one remote CPE.

46. The apparatus of claim 45 wherein said CPE is at least one of a telephone set, a telephone answering device (TAD), digital telephone answering device (DTAD), and a voice mail device.

47. The apparatus of claim 45 further comprising means for said local CPE receiving said at least one ring tone from at least one of a central office (CO) switch, a voice over Internet protocol (VOIP) server, and an Internet service provider (ISP) server prior to taking said local CPE off-hook.

48. The apparatus of claim 45 further comprising means for transmitting an outgoing voice message after taking said CPE off-hook.

49. The apparatus of claim 45 wherein said broadcasting means includes means for paging said at least one remote CPE.

50. The apparatus of claim 45 wherein said broadcasting means includes means for transmitting said voice message over a paging channel.

51. The apparatus of claim 45 wherein said network includes at least one of a VentureNet, a Ethernet, a "blue tooth" network, a X.10 network, a personal computer (PC) network, and a wireless network.

52. The apparatus of claim 45 further comprising means for said at least one remote CPE delivering said voice message to a speaker device.

53. The apparatus of claim 45 further comprising means for said at least one remote CPE storing said voice message.

54. The apparatus of claim 45 wherein said voice message is a call announce identification message .

55. The apparatus of claim 54 wherein said call announce identification message is generated by at least one of a central office (CO) switch, a voice over Internet protocol (VOIP) server, and an Internet service provider (ISP) server.

56. The apparatus of claim 45 further comprising means for receiving a data message instructing said CPE to go off-hook prior to said CPE going off-hook.

57. The apparatus of claim 56 wherein said data message is a frequency shift keying (FSK) signal.

58. An apparatus located at a local CPE for broadcasting incoming call information to at least one remote CPE, said apparatus comprising:

means for receiving incoming caller data at said local CPE;

means for determining, at said local CPE, a corresponding voice message as a

function of at least a portion of said incoming caller data; and

means for broadcasting, using said local CPE, said voice message over a communications network to said at least one remote CPE.

59. The apparatus of claim 58 wherein said CPE is at least one of a telephone set, a telephone answering device (TAD), a digital telephone answering device (DTAD), and a voice mail device.

60. The apparatus of claim 58 further comprising means for said local CPE receiving said at least one ring tone from at least one of a central office (CO) switch, a voice over Internet protocol (VOIP) server, and an Internet service provider (ISP) server prior to said local CPE receiving incoming caller data.

61. The apparatus of claim 58 wherein said incoming caller data is one of calling line identification (CLID) data and second call waiting identification (SCWID) data.

62. The apparatus of claim 58 wherein said local CPE receives said incoming caller data from at least one of a central office (CO) switch, a voice over Internet protocol (VOIP) server, and an Internet service provider (ISP) server.

63. The apparatus of claim 58 wherein said incoming caller data is received as at least one of a frequency shift keying (FSK) signal, a Multipurpose Internet Mail Extension (MIME) format message, a Hypertext Markup Language (HTML) format message, a Java format message, a Javascript message and/or an Active X format message.

64. The apparatus of claim 58 wherein said determining means includes means for parsing a number field derived from said FSK signals, and means for selecting sounds corresponding to said parsed number field.

65. The apparatus of claim 58 wherein said determining means includes means for matching data derived from said FSK signals to associated voice tags.

66. The apparatus of claim 58 wherein said broadcasting means includes means for paging said at least one remote CPE.

67. The apparatus of claim 58 wherein said broadcasting means includes means for transmitting said voice message over a paging channel.

68. The apparatus of claim 58 wherein said network includes at least one of a VentureNet, a Ethernet, a "blue tooth" network, a X.10 network, a personal computer (PC) network, and a wireless network.

69. The apparatus of claim 58 further comprising means for said at least one remote CPE delivering said voice message to a speaker device.

70. The apparatus of claim 58 further comprising means for said at least one remote CPE storing said voice message.

71. An apparatus for broadcasting incoming call information from a local CPE to at least one remote CPE, said apparatus comprising:

means for receiving, at said local CPE, incoming caller data;

means for broadcasting, using said local CPE, said voice message over a communications network to said at least one remote CPE; and

means for determining, at said remote CPE, a corresponding voice message as a function of at least a portion of said incoming caller data.

72. The apparatus of claim 71 wherein said CPE is at least one of a telephone set, a telephone answering device (TAD), digital telephone answering device (DTAD), and a voice mail device.

73. The apparatus of claim 71 further comprising means for said local CPE receiving said at least one ring tone from at least one of a central office (CO) switch, a voice over Internet protocol (VOIP) server, and an Internet service provider (ISP) server prior to said local CPE receiving said incoming caller data.

74. The apparatus of claim 71 wherein said incoming caller data is one of calling line identification (CLID) data and second call waiting identification (SCWID) data.



75. The apparatus of claim 71 wherein said local CPE receives said incoming caller data from at least one of a central office (CO) switch, a voice over Internet protocol (VOIP) server, and an Internet service provider (ISP) server.

76. The apparatus of claim 71 wherein said incoming caller data is received as at least one of a frequency shift keying (FSK) signal, a Multipurpose Internet Mail Extension (MIME) format message, a Hypertext Markup Language (HTML) format message, a Java format message, a Javascript message and/or an Active X format message.

77. The apparatus of claim 71 wherein said determining means includes means for parsing a number field derived from said FSK signals, and means for selecting sounds corresponding to said parsed number field.

78. The apparatus of claim 71 wherein said determining means includes means for matching data derived from said FSK signals to associated voice tags

79. The apparatus of claim 71 wherein said network includes at least one of a VentureNet, a Ethernet, a "blue tooth" network, a X.10 network, a personal computer (PC) network, and a wireless network.

80. The apparatus of claim 71 further comprising means for said at least one remote CPE delivering said voice message to a speaker device.

81. The apparatus of claim 71 further comprising means for said at least one remote CPE storing said voice message.

82. An apparatus for announcing incoming call information at on-hook customer premises equipment (CPE), said apparatus comprising:

means for receiving an indication of an incoming CPE alerting signal (CAS) tone;

means for detecting a frequency shift keying (FSK) signal as a result of receiving said  
5 indication;

means for determining a corresponding voice message as a function of at least a  
portion of said FSK signal; and

means for announcing said voice message.

83. The apparatus of claim 82 wherein said indication is said CAS tone.

84. The apparatus of claim 82 wherein said indication is at least one of an on-hook  
pulse, a muting and a reduced volume, and said apparatus further comprises:

means for detecting the CAS tone using another CPE that is currently off-hook;

means for generating, for a predetermined duration, said on-hook pulse, muting or  
reduced volume from the another CPE when the CAS tone is detected by the another CPE;  
and

means for detecting, by the on-hook CPE, the on-hook pulse, muting or reduced  
volume generated by the another CPE.

85. The apparatus of claim 82 wherein said determining means includes means for  
parsing a number field derived from said FSK signals, and selecting sounds corresponding to  
said parsed number field.

86. The apparatus of claim 82 wherein said determining means includes means for  
matching data derived from said FSK signals to associated voice tags

87. The apparatus of claim 82 wherein said determining means includes means for  
taking said CPE off-hook, and means for receiving a voice message.

88. The apparatus of claim 82 wherein said announcing means includes means for  
delivering said voice message to a speaker device.

89. An apparatus for announcing incoming call information at on-hook customer premises equipment (CPE), said apparatus comprising:

a processor configured to receive an indication of an incoming CPE alerting signal (CAS) tone;

5 a detector configured to detect a frequency shift keying (FSK) signal as a result of receiving said indication;

said processor being configured to determine a corresponding voice message as a function of at least a portion of said FSK signal; and

a speaker configured to announce said voice message.

90. The apparatus of claim 89 wherein said indication is said CAS tone.

91. The apparatus of claim 89 wherein said indication is at least one of an on-hook pulse, a muting and a reduced volume, and said apparatus further comprises:

a monitor configured to detect the CAS tone at another CPE that is currently off-hook;

5 a further processor configured to generate, for a predetermined duration, said on-hook pulse, muting or reduced volume from the another CPE when the CAS tone is detected by the another CPE; and

a further detector configured to detect, at the on-hook CPE, the on-hook pulse, muting or reduced volume generated by the another CPE.

92. The apparatus of claim 89 wherein said processor is further configured to parse a number field derived from said FSK signals and to select sounds corresponding to said parsed number field.

93. The apparatus of claim 89 wherein said processor is further configured to match data derived from said FSK signals to associated voice tags



## ABSTRACT OF THE DISCLOSURE

A local CPE broadcasts incoming call information to at least one remote CPE. Before or after at least one ring tone is received, the local CPE is taken off-hook. An incoming voice message is received, and the incoming voice message is broadcast over a communications network to the remote CPE. Alternatively, incoming caller data is received, a corresponding voice message is determined as a function of at least a portion of the incoming caller data, and the voice message is broadcast over a communications network to the remote CPE. As a further alternative, the caller data is broadcast over the communications network, and the corresponding voice message is determined by the remote CPE. As yet another alternative, incoming call information is announced using on-hook customer premises equipment (CPE). An indication of an incoming CPE alerting signal (CAS) tone is received, a frequency shift keying (FSK) signal is detected as a result of receiving the indication. A corresponding voice message is determined as a function of at least a portion of the FSK signal, and the voice message is announced.

G:\Apps\WPDATA\NORTEL\3229\APPLICATION

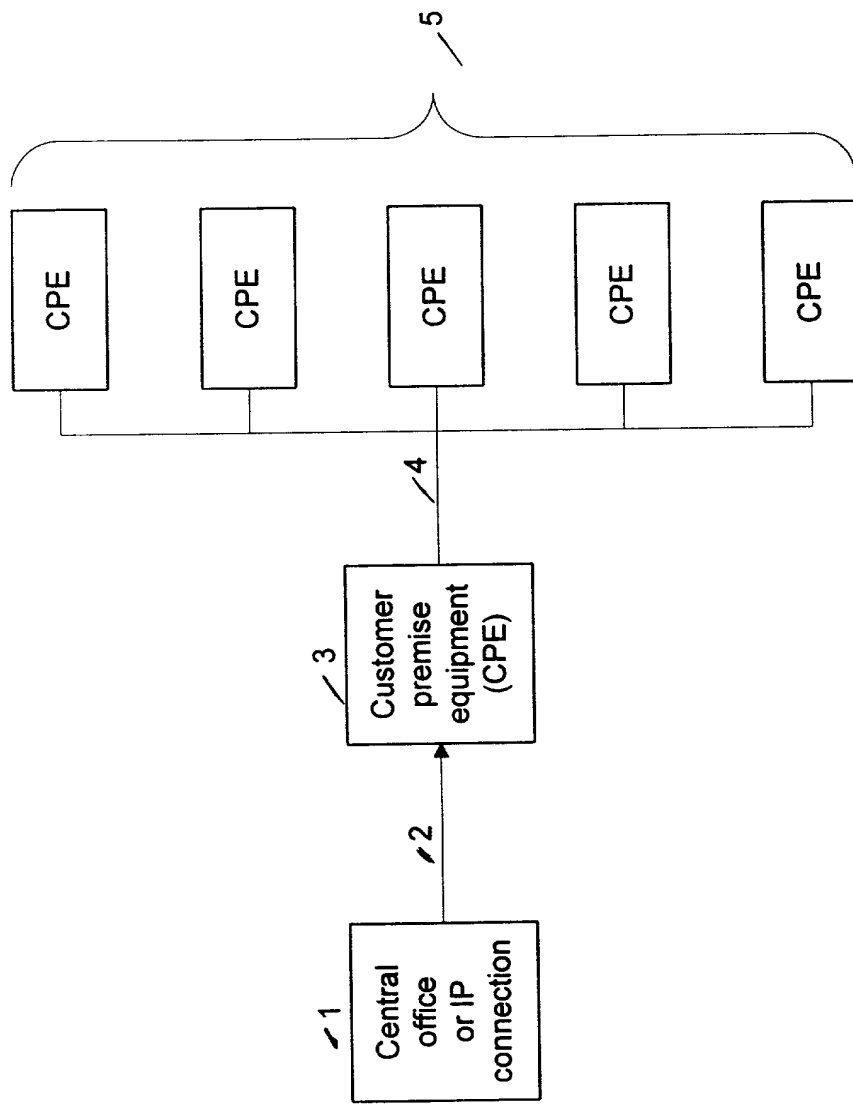


FIG. 1

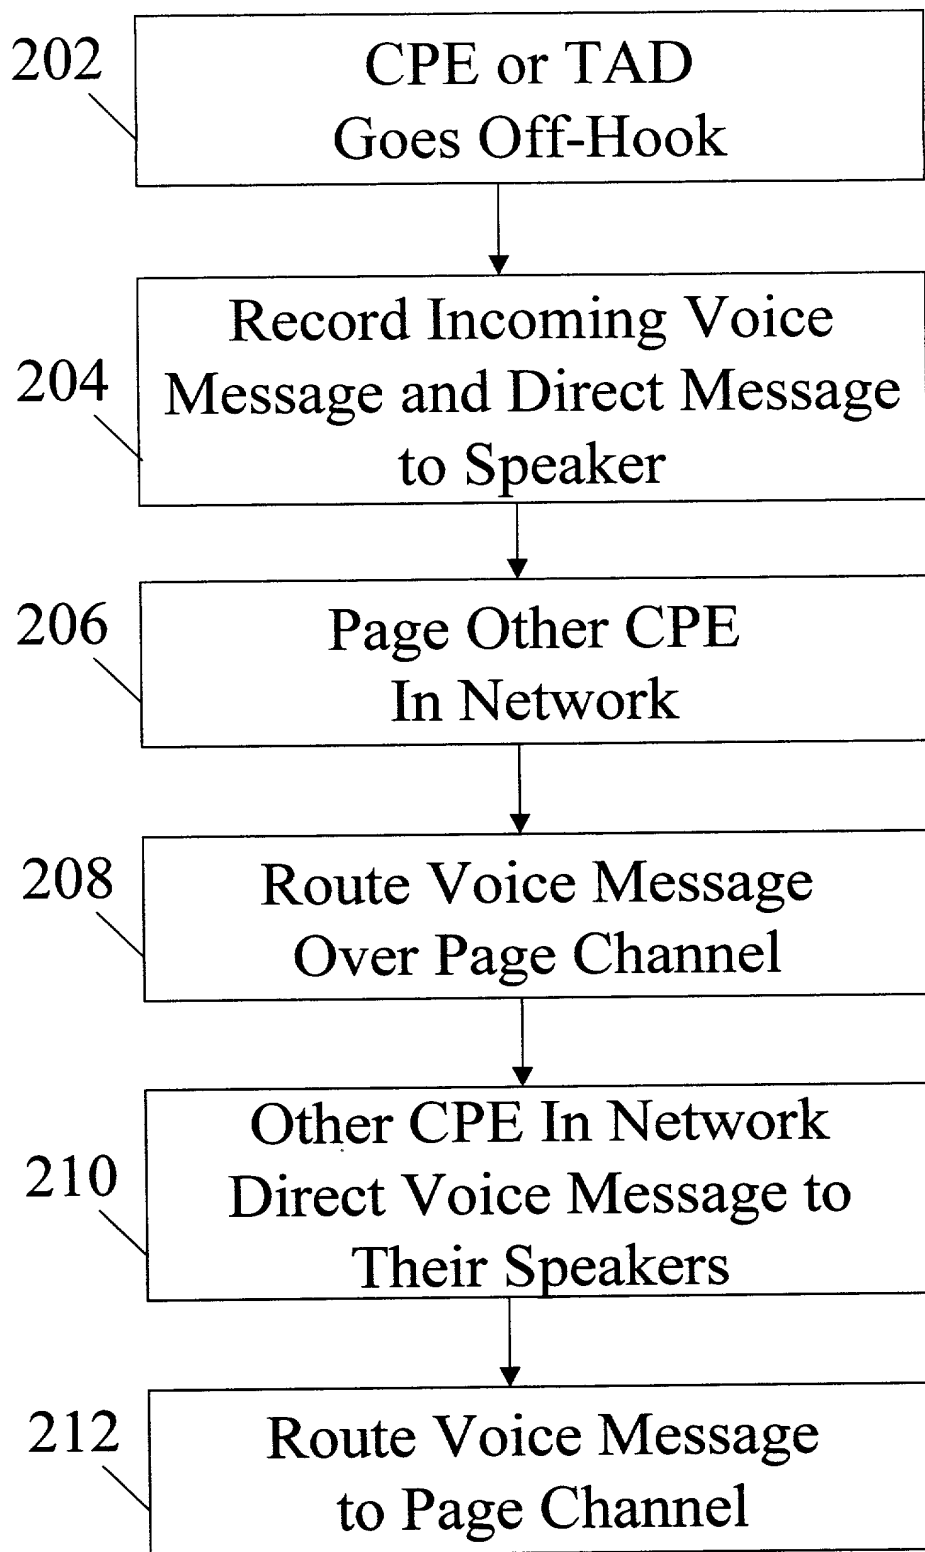


FIG.2

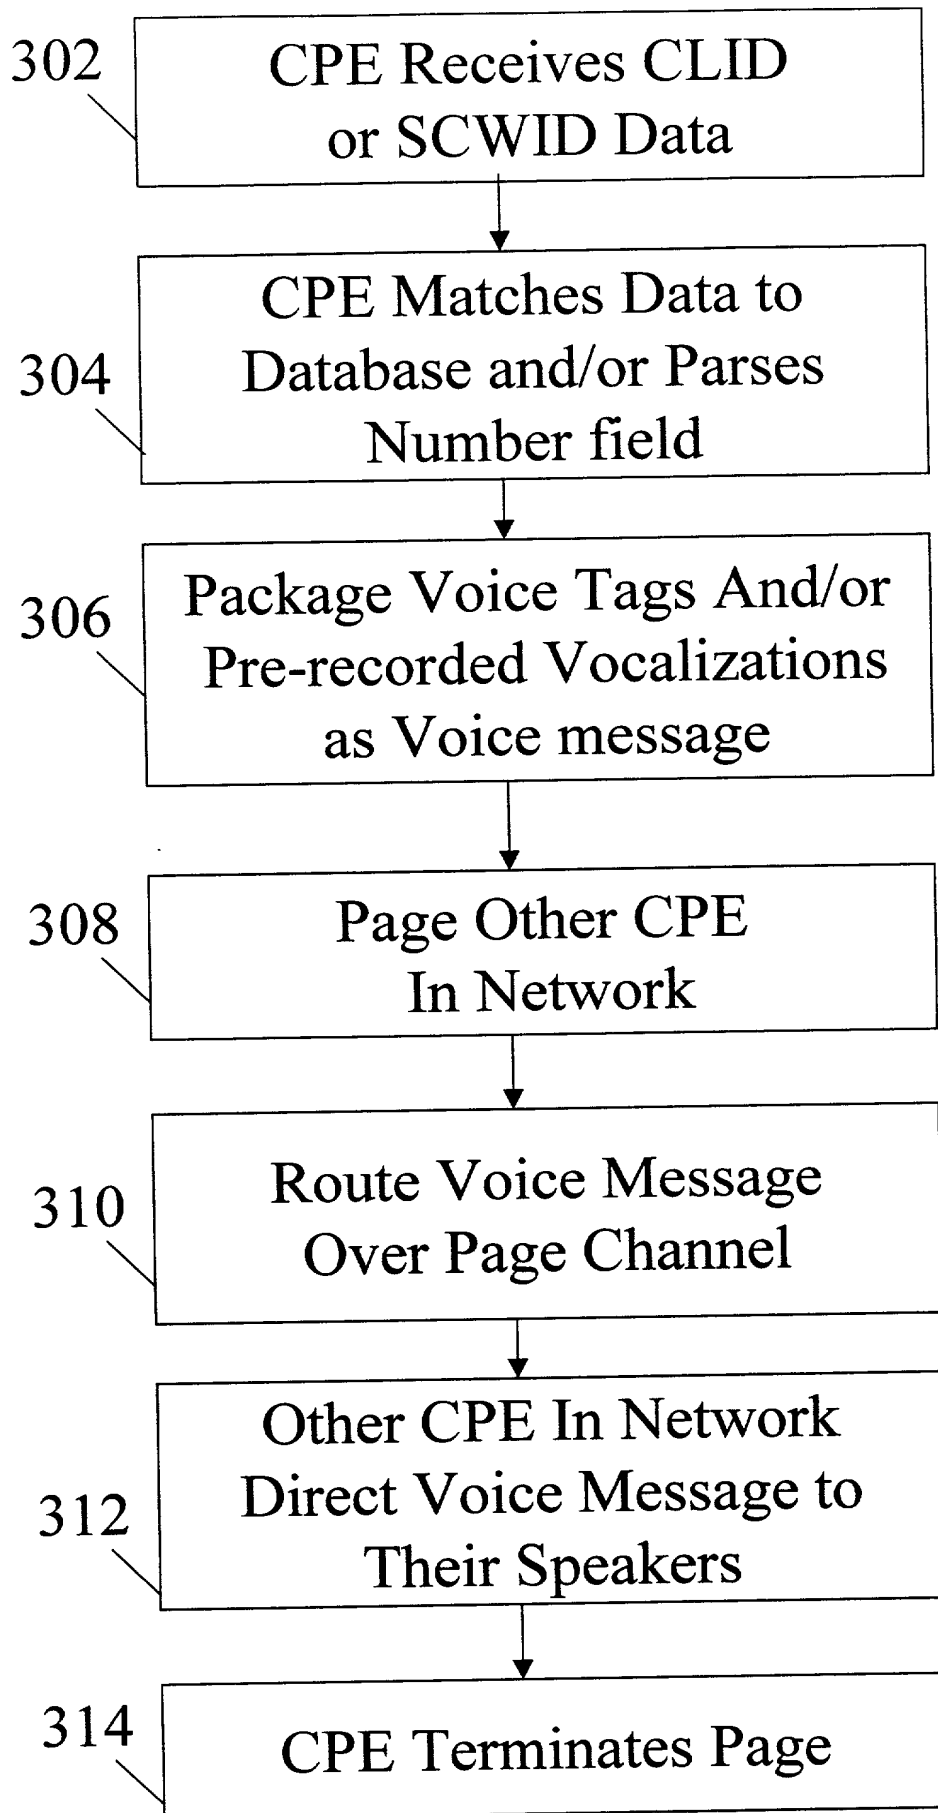


FIG.3



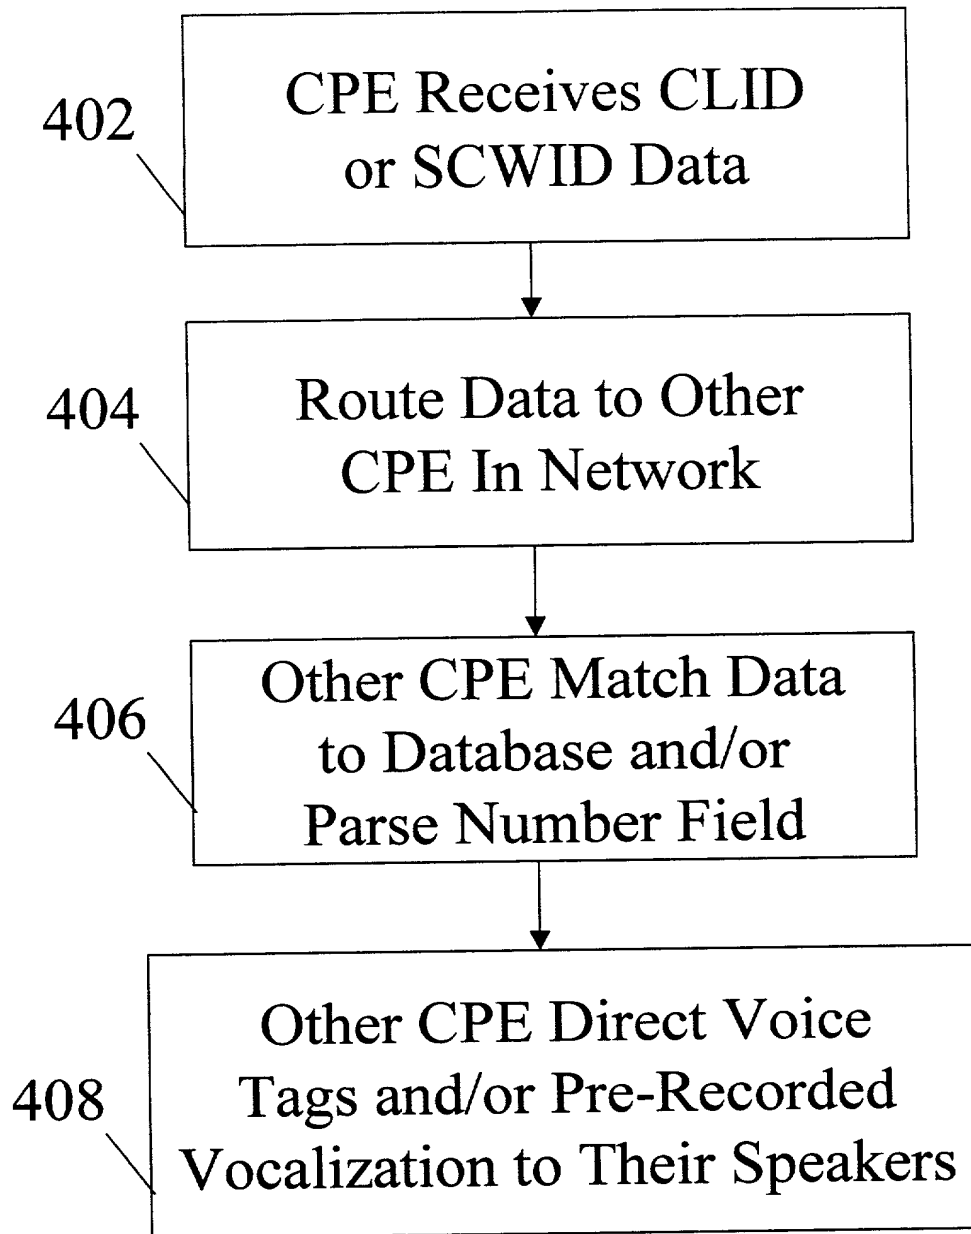


FIG.4



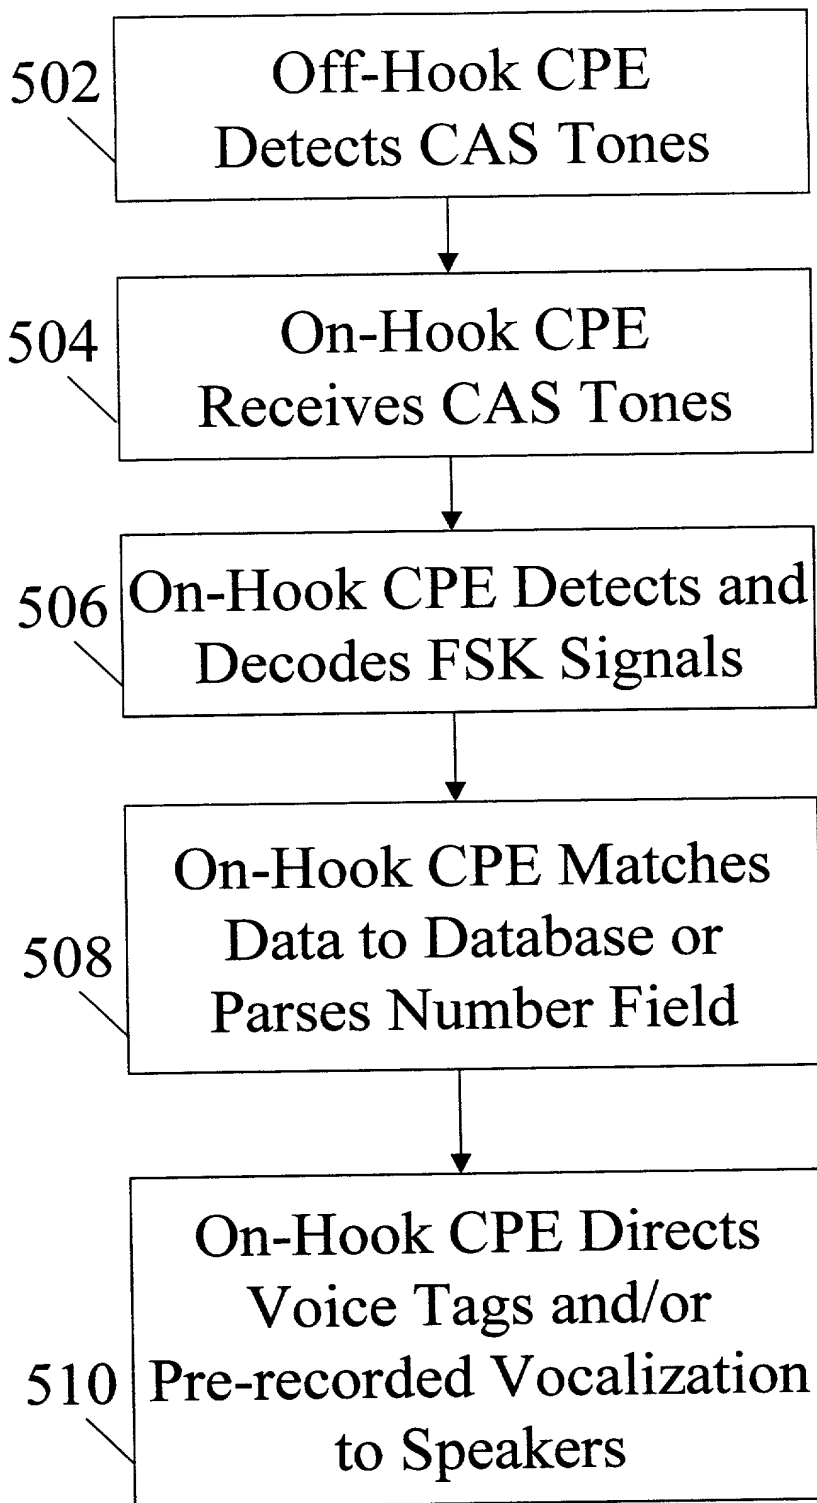


FIG.5

FIG. 6

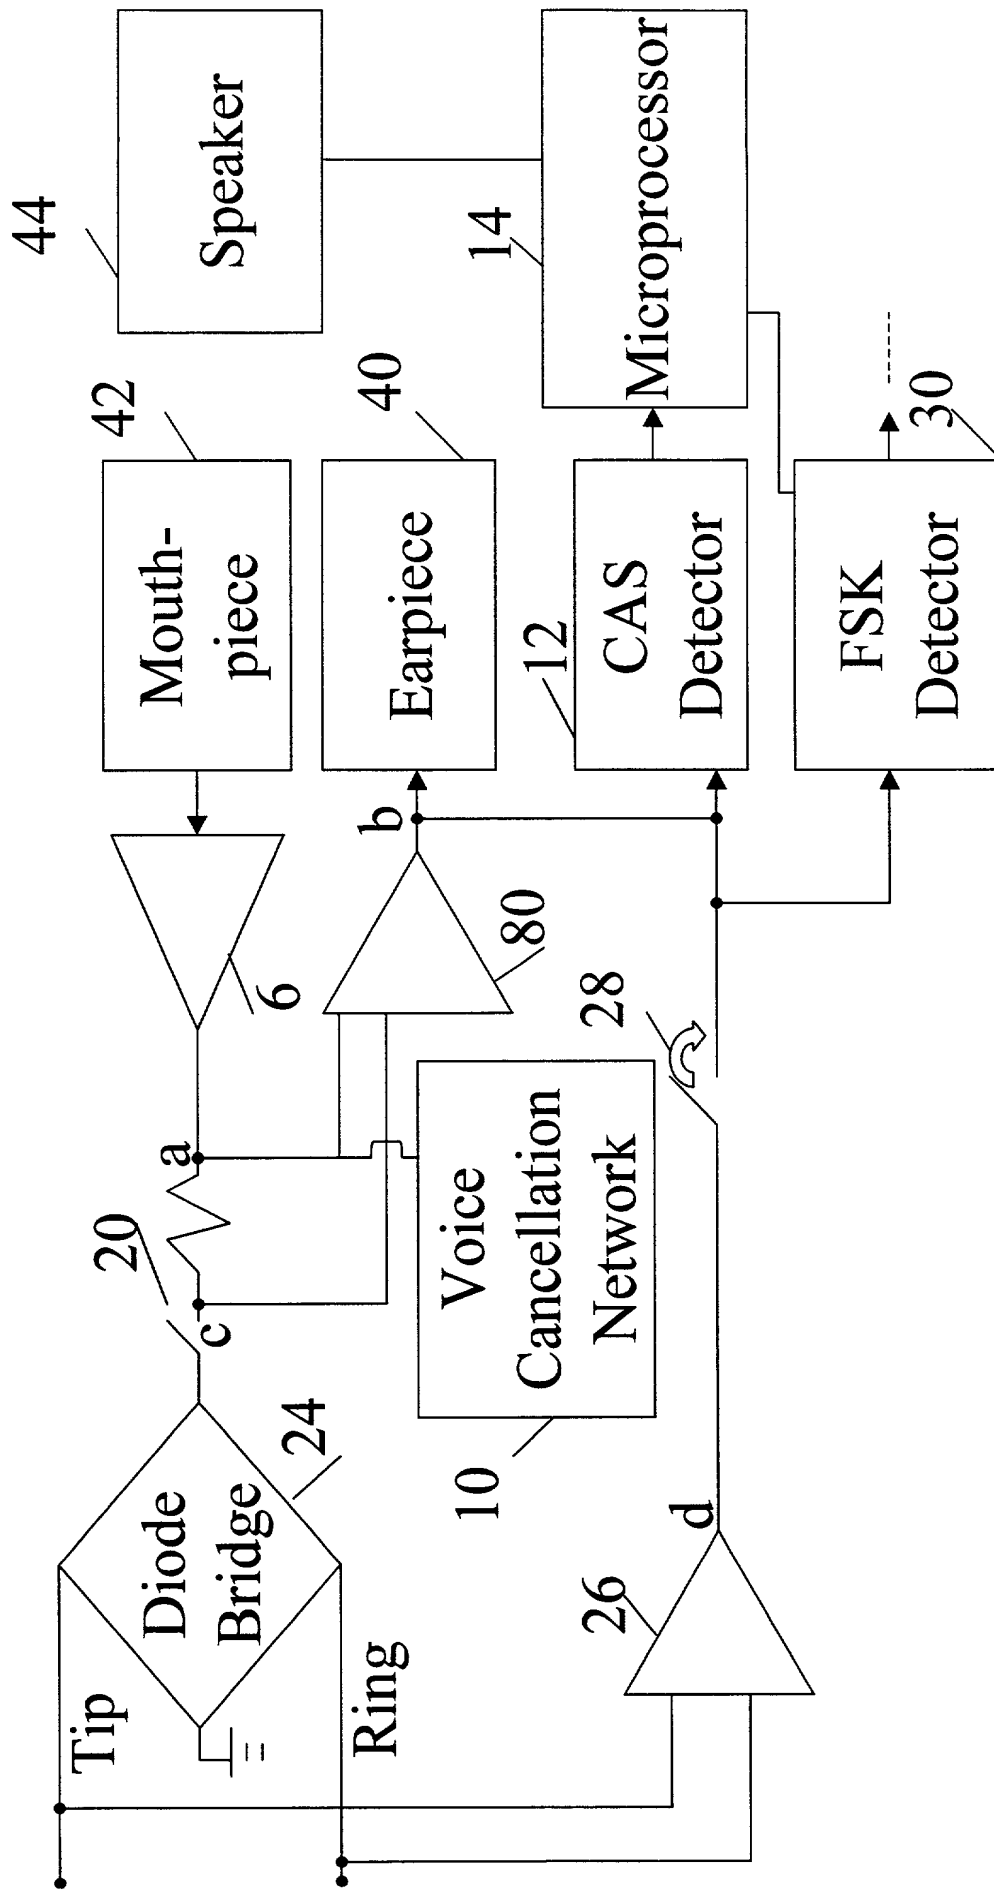

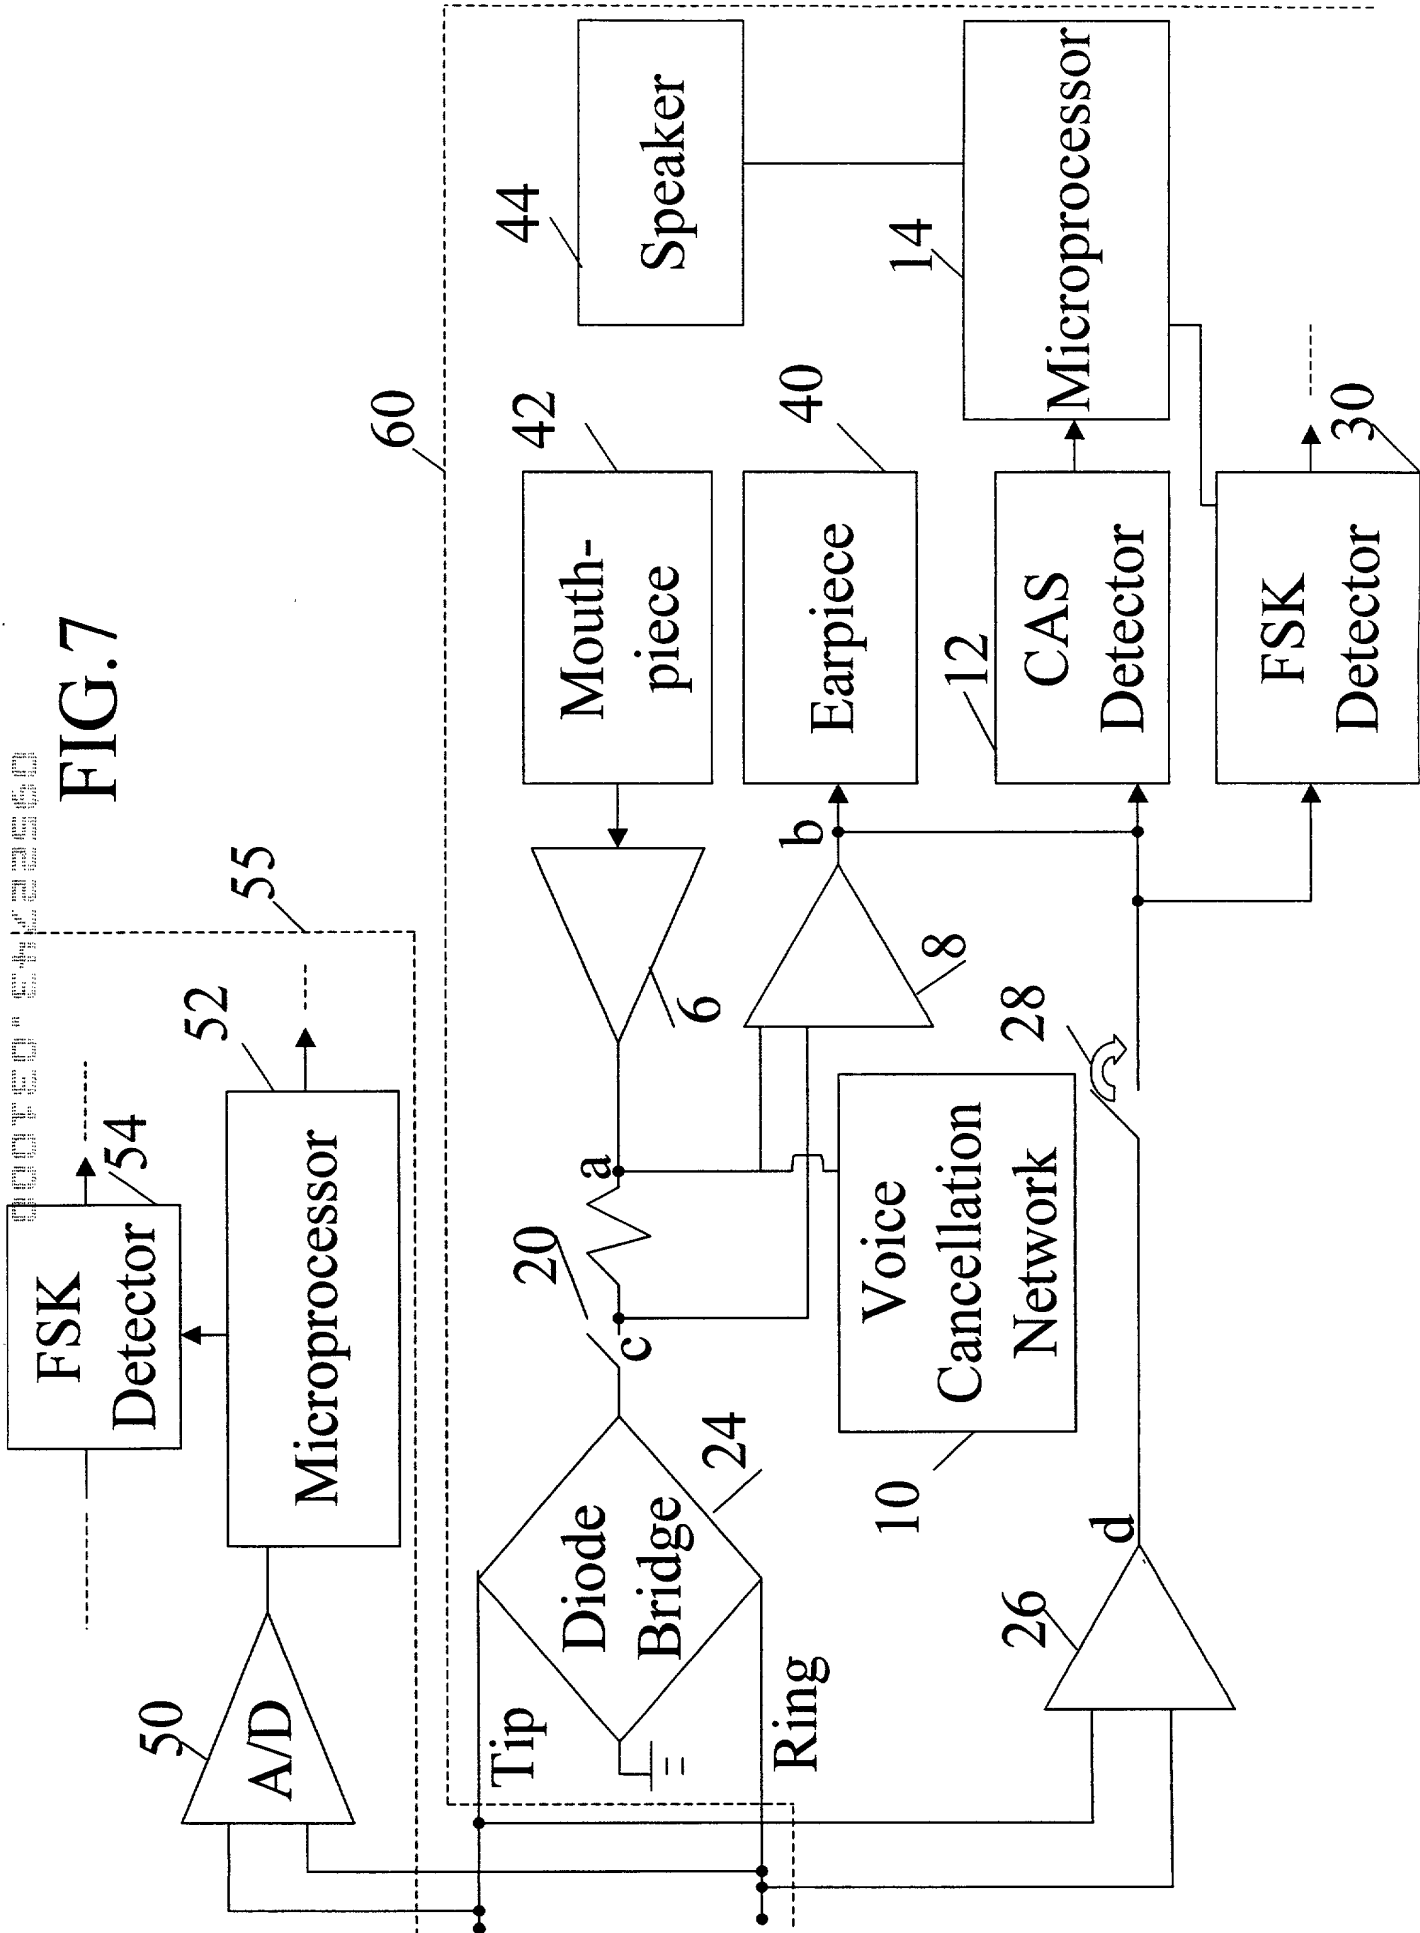

## DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that

My residence, post office address and citizenship are as stated below next to my name

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

### REMOTE BROADCAST OF CALL ANNOUNCE AND CALL SCREENING INFORMATION

specification of which is attached hereto unless the following is checked:

[ ] was filed on \_\_\_\_\_ as United States Application Number or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or having a filing date before that of the application on which priority is claimed

Prior Foreign Application(s)

Priority Claimed

|                   |                    |                                 |                |
|-------------------|--------------------|---------------------------------|----------------|
| _____<br>(Number) | _____<br>(Country) | _____<br>(Day/Month/Year Filed) | ___ Yes ___ No |
| _____<br>(Number) | _____<br>(Country) | _____<br>(Day/Month/Year Filed) | ___ Yes ___ No |

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

|                               |                        |
|-------------------------------|------------------------|
| _____<br>(Application Number) | _____<br>(Filing Date) |
| _____<br>(Application Number) | _____<br>(Filing Date) |

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application

|                               |                        |  |
|-------------------------------|------------------------|--|
| _____<br>(Application Number) | _____<br>(Filing Date) | _____<br>(Status - patented, pending, abandoned) |
| _____<br>(Application Number) | _____<br>(Filing Date) | _____<br>(Status - patented, pending, abandoned) |

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. Peter T. Cobrin, Reg. No. 24,117, Marvin S. Gittes, Reg. No. 24,350, Richard M. Lehrer, Reg. No. 38,536, Robert J. Hess, Reg. No. 32,139, David W. Denenberg, Reg. No. 40,986, Michael A. Adler, Reg. No. 38,810, Gerald J. Cechony, Reg. No. 31,335, Lawrence E. Russ, Reg. No. 35,342

Address all correspondence to COBRIN & GITTES  
750 Lexington Avenue, New York, New York 10022 Telephone (212) 486-4000 Facsimile (212) 486-4007

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statement and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon

Full name of sole or first inventor (given name, family name) Alan D. Eyre

Inventor's signature \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Calgary, AB, Canada

Post Office Address: 43 Heston St. N.W., Calgary, AB, T2K 2C3, Canada

Citizenship: Canada

Full name of second joint inventor (given name, family name) Brian Buckler

Inventor's signature \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Calgary, AB, Canada

Post Office Address: 1236-40th Ave. N.W., Calgary, AB, T2K 0G4, Canada

Citizenship: Canada

Full name of third inventor (given name, family name) Jim B. Paarsmarkt

Inventor's signature \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Calgary, AB, Canada

Post Office Address: 69 Sussex Cres, S.W., Calgary, AB, T2W 0L6, Canada

Citizenship: Canada

Full name of fourth inventor (given name, family name) Jerry Freestone

Inventor's signature \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Calgary, AB, Canada

Post Office Address: 303-7 Harvest Gold Manor, N.E., Calgary, AB, T3K 4Y3, Canada

Citizenship: Canada

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statement and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Additional inventors are being named on separately numbered sheets attached hereto.